



ArtiTeq®

Dibond Hanger

FOR DIBOND, FOREX AND PLEXIGLASS



INVISIBLE HANGING

clean wall presentation

Create a clean, professional wall presentation without visible hooks or fixings. The Dibond Hanger is suitable for Dibond, Forex and Plexiglass panels and keeps the focus entirely on the image.

WHY CHOOSE THE DIBOND HANGER?


smart and invisible mounting

1 INVISIBLE

No visible hanging hardware around the panel



2 ADJUSTABLE and FLEXIBLE



Use the Dibond Tuner to fine-tune the panel vertically and horizontally.

Suitable for Dibond, Forex and Plexiglass panels.

3 COMPLETE OPTIONS




Available separately, in bulk or as a complete mounting set

DIBOND HANGER

packed per 10 or bulk packaging

The Dibond Hanger is a self-adhesive hook made of galvanised steel. To hang a Dibond, Forex or Plexiglass wall panel, this invisible hanging system is attached to the back of the panel.

The Dibond Hangers are available in bigger quantities. It is possible to order the Dibond Hanger packed per 10 pieces or in bulk quantities.

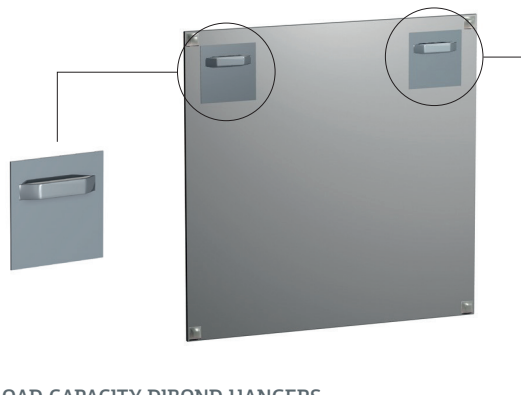


LOAD CAPACITY DIBOND HANGERS

Dimensions	Load capacity*/**
45 x 45 mm	max. 1 kg
70 x 70 mm	max. 2 kg
100 x 100 mm	max. 4 kg
100 x 200 mm	max. 8 kg

* Combine 2 identical Dibond Hangers to double the load capacity.

** For large wall panels, we recommend using 2 Dibond Hangers.

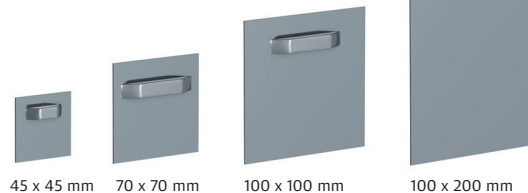

DIBOND HANGER

complete set

For optimal convenience, choose a complete set!

The set consists of:

-Dibond Hanger available sizes:

- 45 x 45 mm
- 70 x 70 mm
- 100 x 100 mm
- 100 x 200 mm

-Assembly manual

-Screw

-Fisher duopower plug



-Two spacers

-Cleaning wipe

-Dibond Tuner (adjustable mounting bracket)



CONTENT DIBOND HANGER SET

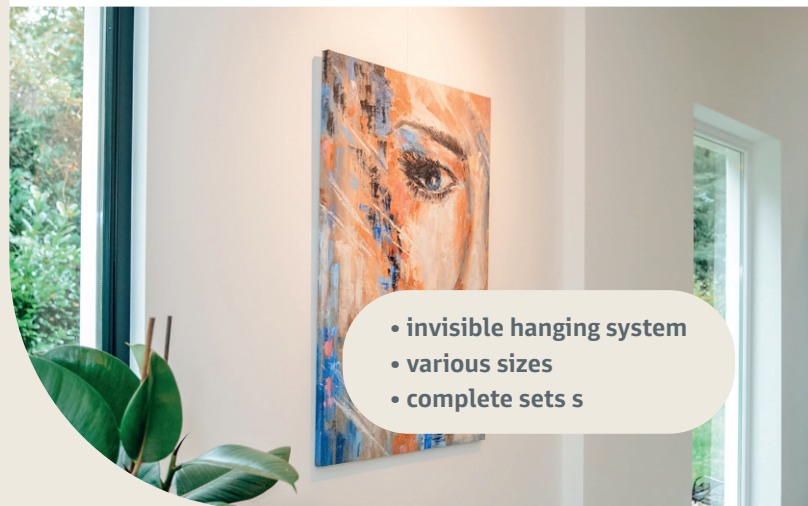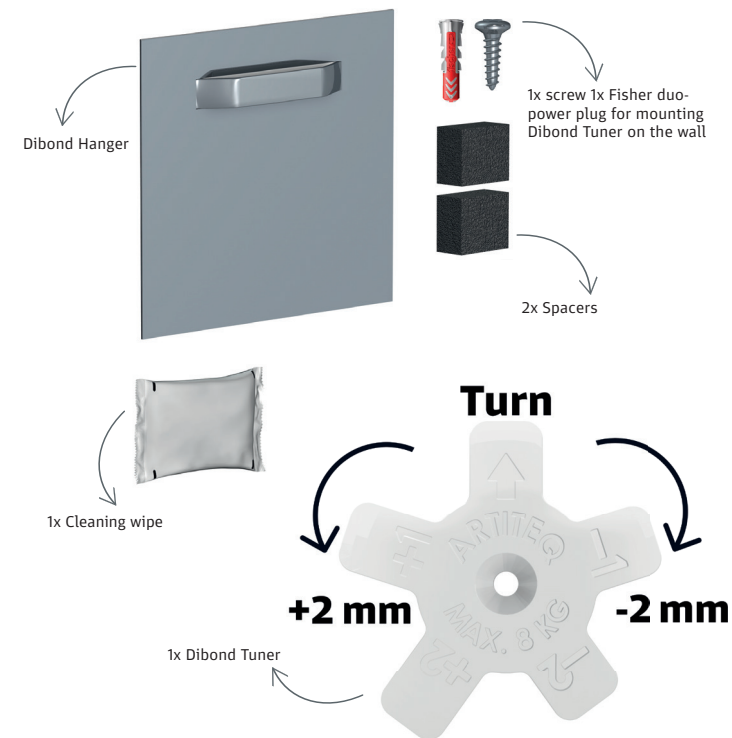

- invisible hanging system
- various sizes
- complete sets

ASSEMBLY DIBOND HANGER

easy suspension

MONTAGE DIBOND HANGER

Prior of using the Dibond Hanger, it is important to proceed the following steps:



Step 1 Make sure that the surface where the Dibond Hanger will be attached to the panel is grease-free. You can use alcohol to remove grease from the panel. After cleaning the panel, allow the surface to dry.

Step 2 Stick the Dibond Hanger on the degreased surface on the back of the panel.

Step 3 Apply a heavy weight on top of the Dibond Hanger and allow to rest for 72 hours.

You can now easily hang the wall panel with Dibond Hanger.

ASSEMBLY STEPS

Step	Action
Step 1	
Step 2a	
Step 2b	
Step 3	




DIBOND TUNER

adjustable mounting bracket

DIBOND TUNER - ADJUSTABLE MOUNTING BRACKET

A plastic adjustable mounting bracket for solid and sturdy mounting of a Dibond, Forex or Plexiglas wall panel with a load capacity of up to 8 kg. The Dibond Tuner is adjustable. By turning it, the panel can be adjusted vertically (up to 4 mm). The Dibond Tuner can also be moved horizontally along the length of the Dibond Hanger. The ability to adjust allows the panel to be hung perfectly level!

First, mount the Dibond Tuner hanging bracket to the wall using the screw and plug provided. Then hang the wall panel with Dibond Hanger over the hanging bracket on the wall. The Dibond Tuner hanging bracket can be used in combination with all Dibond Hangers from 45 x 45 mm up to 100x 200 mm.

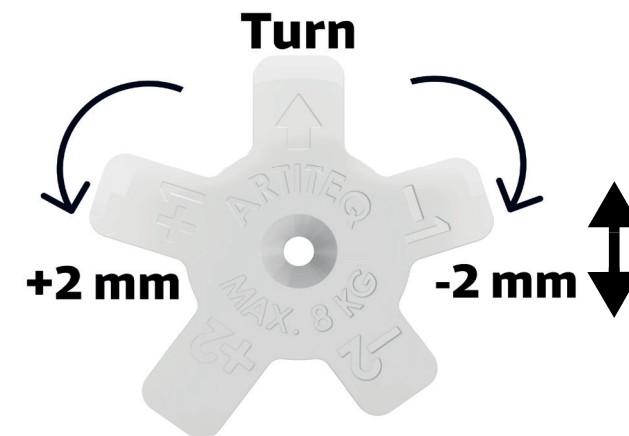

Scan
for more
info





ARTITEQ

Herastraat 39

5047 TX Tilburg

The Netherlands

+31 (0)13 572 90 70

info@artiteq.com

artiteq.com